

## All-In-One Digital Signage Player

All-In-One FHD Signage Player , AMD Turion™ II 2.2G CPU w/HD 4200 GPU

**sPPC-2200**



### Features



- 21.5" Full HD display panel PC
- Built-in AMD 785E HD4200 graphics
- DirectX® 10.1 & OpenGL 2.0 support
- Slim design (40mm thick)
- Removable 2.5" SATA HDD tray
- Optional I/O protection cover
- Optional Touch CCD for interactive function (for OEM/ODM)

### Specifications

System Mainboard	IB889-22
CPU Type	AMD Turion™ II Neo N54H processor on board (2.2GHz)
System Speed	2.2GHz
Memory	2x DDR3 1066MHz SO-DIMM, Max. 4GB
Graphics	AMD 785E built-in Radeon HD4200 graphics
Construction	Steel (SGCC)
Chassis	Black
Extension I/O	1x DVI-I, 2x Gigabit LAN, 4x USB
HDD Expansion	Removable 2.5" SATA HDD tray
Power Supply	+12V DC-in 60W adaptor
Speaker	2x 10W 8ohm speakers
Mounting	VESA mount, 100mm x100mm
Dimensions	540mm(W) x 296mm(H) x 40mm(D)
LCD Size	21.5" TFT LCD
LCD Color	16.7M colors
Backlight	LED
Display Resolution	1920x1080 16:9 Full HD
LCD Brightness	250 cd/cm2
Dot Pitch	248.25 um x 248.25 um
Viewing Angle	170°/160°
Backlight MTBF	30,000 hrs
Operating Temperature	0°C~ 45°C (32°F~113°F)
Storage Temperature	-20° ~ 80°C (-4°F~176°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)

### Ordering Information

sPPC-2200	21.5" Panel PC with 2.2GHz AMD Turion™ II Neo N54H CPU, 2GB DDR3 SO-DIMM, 60W power adaptor
sPPC-2200/IOC	sPPC-2200 IO protection cover

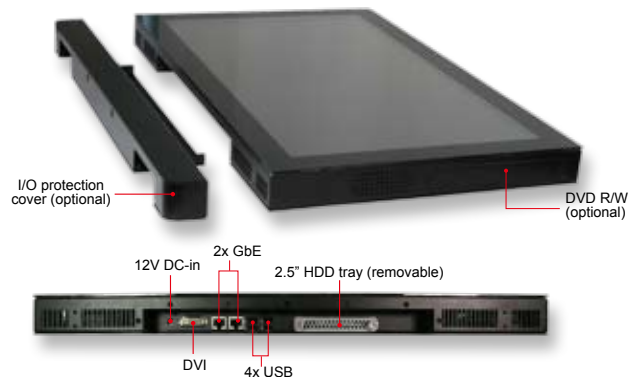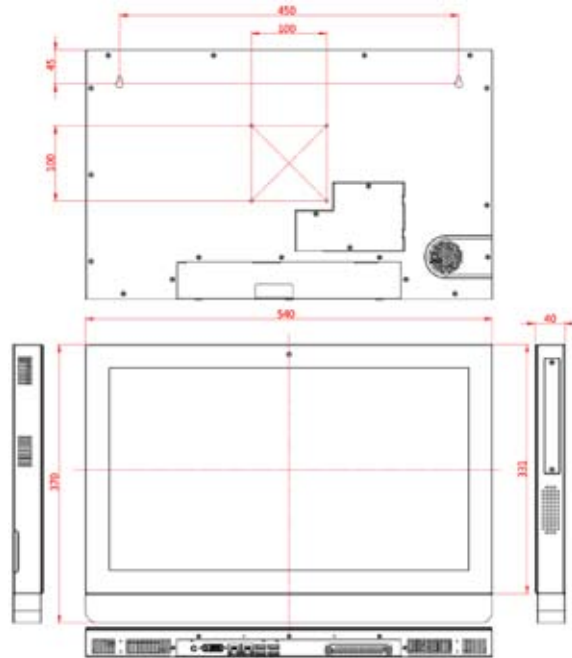

1 eFlex Platform

2 Motherboards

3 Disk-Size SBCs

4 CPU Modules

5 PC/104 Plus

6 CPU Cards

7 Embedded Systems

8 Network Security Appliance